


QVR、QVR-105 汽车电线
PVC insulation Auto Wire with QVR、QVR-105

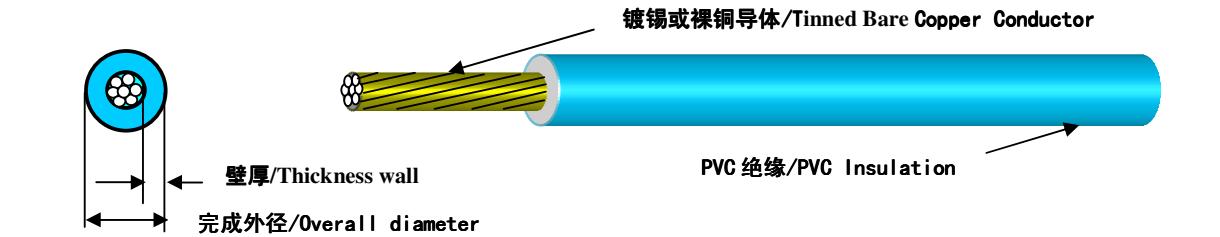

产品执行标准/Product executive standard:

JB/T8139-1999

Description:

Bare or tinned stranded copper conductor; 0.3-120 spmm

Temperature range: 70 or 105℃

Thermosetting and good mechanical characters

PVC material of insulation.

Easy stripping and cutting.

Resistant to acids, alkalis, oils, moisture and fungi.

Application:

It's applicable to low tension primary wire of electric system for auto within.

说明:

导体使用裸铜或镀锡铜绞线, 0.3-120 mm²

温度范围: 70 或 105℃

PVC 绝缘, 优良热稳定性和机械性能

易开线和剥皮。

抗酸碱, 耐油及防潮霉性能好。

应用:

适用于汽车内部电气系统用低压电线

Specification: 技术参数:

规格 SPEC	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)	完成外径 Overall diameter (mm)	包装尺寸 Package size M/R
			Average		
0.30	7/0.254	0.80	0.60	2.0~2.2	1000
0.50	16/0.20	1.00	0.60	2.2~2.4	1000
0.75	24/0.20	1.15	0.60	2.4~2.6	1000
0.85	27/0.20	1.20	0.60	2.5~2.7	1000
1.00	32/0.20	1.35	0.60	2.6~2.8	1000
1.25	40/0.20	1.45	0.60	2.7~2.9	1000
1.50	30/0.25	1.70	0.60	2.9~3.1	500
2.00	41/0.254	1.85	0.60	3.2~3.4	500
2.50	49/0.25	2.00	0.70	3.5~3.7	500
3.00	61/0.25	2.25	0.80	3.8~4.0	500
4.00	56/0.30	2.75	0.80	4.3~4.5	500
5.00	71/0.30	2.90	0.80	4.6~4.8	500
6.00	84/0.30	3.30	0.80	4.8~5.0	200
8.00	50/0.45	3.70	0.90	5.5~5.7	200
10.00	84/0.40	4.25	1.00	6.3~6.5	200
16.00	126/0.40	5.90	1.20	8.3~8.5	100
20.00	7/56/0.254	6.55	1.52	9.6~9.9	100
25.00	19/26/0.254	7.45	1.52	10.5~10.8	100
35.00	19/37/0.254	8.90	1.52	11.9~12.2	100
50.00	19/52/0.254	10.60	2.03	14.6~15.0	100
70.00	19/73/0.254	12.50	2.03	16.6~17.0	100

单支导体公差/Conductor tolerance: +/-0.005mm, 导线外径公差 订货资料/Order reference:.

可选颜色 (SAE 标准色系): 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。